



2021-2022

PRODUCT CATALOGUE

LED PUCK LIGHTS

LED - CT3 - 3W

- CRI: >80
- Light Source: SMD2835
- Diameter: 69mm
- Thickness: 13.5mm
- Wattage(W): 3W
- Lumens(LM): 165LM
- Luminous Efficiency: 55lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Hole Cut: Ø58
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT4 - 3W

- CRI: >80
- Light Source: SMD2835
- Diameter: 69mm
- Thickness: 13.5mm
- Wattage(W): 3W
- Lumens(LM): 210LM
- Luminous Efficiency: 70lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 45°
- Hole Cut: Ø58
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT5 - 5W

- CRI: >80
- Light Source: SMD2835
- Diameter: 79.5mm
- Thickness: 9.5mm
- Wattage(W): 5W
- Lumens(LM): 300LM
- Luminous Efficiency: 60lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Installation: Surface mount
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT6 - 5W

- CRI: >80
- Light Source: SMD2835
- Diameter: 79.5mm
- Thickness: 9.5mm
- Wattage(W): 5W
- Lumens(LM): 300LM
- Luminous Efficiency: 60lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Installation: Surface mount
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT2 - 2.5W

- CRI: >80
- Light Source: SMD2835
- Diameter: 59.5mm
- Thickness: 9mm
- Wattage(W): 2.5W
- Lumens(LM): 150LM
- Luminous Efficiency: 60lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Installation: Surface mount
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT13 - 2.5W

- CCR: >80
- Light Source: SMD2835
- Diameter: 59.5mm
- Thickness: 9mm
- Wattage(W): 2.5W
- Lumens(LM): 150LM
- Luminous Efficiency: 60lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Installation: Surface mount
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT1 - 3W

- CRI: >80
- Light Source: SMD2835
- Diameter: 69.5mm
- Thickness: 14mm
- Wattage(W): 3W
- Lumens(LM): 210LM
- Luminous Efficiency: 70lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 90°
- Installation: Surface mount
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT18 - 1W

- CRI: >80
- Light Source: SMD
- Diameter: 33.5mm
- Thickness: 15.5mm
- Wattage(W): 1W
- Lumens(LM): 45LM
- Luminous Efficiency: 45lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Hole Cut: Ø28
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT19 - 3W

- CRI: >80
- Light Source: COB
- Diameter: 89mm
- Thickness: 25mm
- Wattage(W): 3W
- Lumens(LM): 240LM
- Luminous Efficiency: 80lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 24°
- Hole Cut: Ø75mm
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT20 - 3W

- CRI: >80
- Light Source: COB
- Diameter: 89mm
- Thickness: 28mm
- Wattage(W): 3W
- Lumens(LM): 240LM
- Luminous Efficiency: 80lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 24°
- Hole Cut: Ø75mm
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



LED - CT21 - 3.5W

- CRI: >80
- Light Source: 2835
- Diameter: 71mm
- Thickness: 20mm
- Wattage(W): 3.5W
- Lumens(LM): 245LM
- Luminous Efficiency: 70lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Hole Cut: Ø60mm
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: Iron + aluminum



LED - CT3P - 2.5W

- CRI: >80
- Light Source: SMD
- Diameter: 69.5mm
- Thickness: 13.5mm
- Wattage(W): 2.5W
- Lumens(LM): 138LM
- Luminous Efficiency: 55lm/w
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Beam Angle: 120°
- Hole Cut: Ø59mm
- Working Lifetime(Hour): 50000
- Colour: BK/SN/CH/NW
- Lamp body material: aluminum



DR1-18W12V-2510

Input Voltage(V): 100-240V 50/60Hz
 Output Voltage(V): DC12V
 Output current(A): MAX1.5A
 Power Angle: >0.9
 Efficiency:>80%



DR2-24W12V-DC

Input Voltage(V): 100-240V 50/60Hz
 Output Voltage(V): DC12V
 Output current(A): 2A
 Power Angle: >0.9
 Efficiency:>80%



LED CABINET LIGHT

LED - CT7 - 3W / LED - CT7 - 6W / LED - CT7 - 12W

- Size: 300x17x7mm / 500x17x7mm / 1000x17x7mm
- CRI: > 80
- Light Source: SMD 2835
- Wattage(W) : 3W / 6W / 12W
- Lumens(LM) : 180LM / 360LM / 720LM
- Luminous Efficiency: 60 lm/w
- Mounting method: surface mounting
- Color Temperature(CCT): 3000K/4000K/5000K
- Input Voltage(V) : DC12V
- Beam Angle: 120°
- Working Lifetime(Hour): 50000
- Colour: Silver oxide
- Lamp body material: aluminum



LED - CT9 - 3W / LED - CT9 - 6W / LED - CT9 - 12W

- Size: 300x25x7mm / 500x25x7mm / 1000x25x7mm
- CRI: > 80
- LightSource: SMD 2835
- Wattage(W) : 3W / 6W / 12W
- Lumens(LM): 180LM / 360LM / 720LM
- LuminousEfficiency: 60lm/w
- Mounting method: surface mounting

- Color Temperature(CCT) : 3000K/4000K/5000K
- Input Voltage(V): DC12V
- BeamAngle: 120°
- Working Lifetime(Hour): 50000
- Colour: Silver oxide
- Lamp body material: aluminum



LED - CT10 - 3W / LED - CT10 - 6W / LED - CT10 - 12W

- Size: 300x25x7mm / 500x25x7mm / 1000x25x7mm
- CRI: > 80
- LightSource: SMD 2835
- Wattage(W) : 3W/6W/12W
- Lumens(LM) : 180LM / 360LM / 720LM
- LuminousEfficiency: 60lm/w
- Mounting method: surface mounting

- Color Temperature(CCT) : 3000K/4000K/5000K
- Input Voltage(V): DC12V
- BeamAngle: 120°
- Working Lifetime(Hour): 50000
- Colour: Silver oxide
- Lamp body material: aluminum



LED - CT8 - 3W / LED - CT8 - 6W / LED - CT8 - 12W

- Size: 300x17x7mm / 500x17x7mm / 1000x17x7mm
- CRI: > 80
- LightSource: SMD 2835
- Wattage(W) : 3W/6W/12W
- Lumens(LM) : 180LM / 360LM / 720LM
- LuminousEfficiency: 60lm/w
- Mounting method: surface mounting

- Color Temperature(CCT) : 3000K/4000K/5000K
- Input Voltage(V) : DC12V
- BeamAngle: 120°
- Working Lifetime(Hour) : 50000
- Colour: Silver oxide
- Lamp body material: aluminum




LED - CT11 - 3W / LED - CT11 - 6W / LED - CT11 - 12W

- Size: 300x38x15mm / 500x38x15mm / 1000x38x15mm
- Material: Aluminum
- Light Source: SMD 2835
- Power Source Type: built-in
- Shade Material: Plastic
- Wattage(W): 3W/6W/12W
- Mounting method: 3W/6W/12W
- Mounting method: surface mounting

- Lumens(LM): 180LM / 360LM / 720LM
- Color Temperature(CCT): 3000K/4000K/5000K
- Input Voltage(V): DC12V
- Special Features: Adjustable light
- Working Lifetime(Hour): 50000
- Colour: Silver oxide
- Lamp body material: aluminum



LED Slim Lights

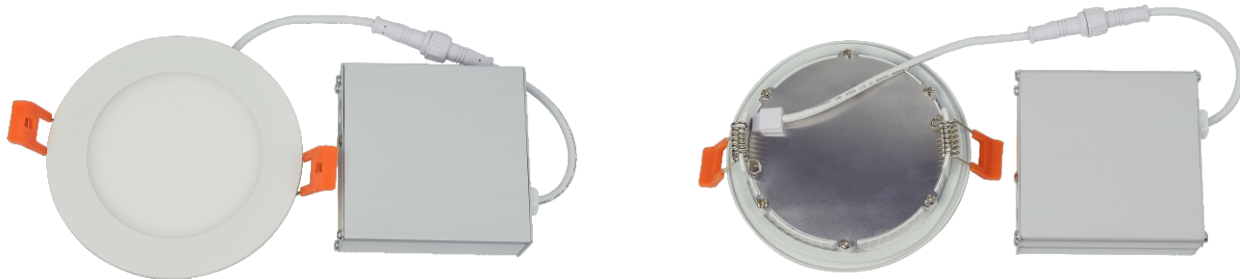

Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable	
LED-320 LED-320-3CCT LED-320-5CCT	420LM	SMD2835	warm white (2700-3000K)	AC 110-120V	6W	≥80	110°	Ø75mm	Yes	
LED-420 LED-420-3CCT LED-420-5CCT	630LM	SMD2835		AC 110-120V	9/12W	≥80	110°	Ø108mm	Yes	
LED-421 LED-421-3CCT LED-421-5CCT	630LM	SMD2835		AC 110-120V	9/12W	≥80	110°	Ø108mm	Yes	
LED-520 LED-520-3CCT LED-520-5CCT	900LM	SMD2835	commercial white (3500-4000K)	AC 110-120V	12W	≥80	110°	Ø135mm	Yes	
LED-620 LED-620-3CCT LED-620-5CCT	1125LM	SMD2835		AC 110-120V	15W	≥80	110°	Ø157mm	Yes	
LED-820 LED-820-3CCT LED-820-5CCT	1350LM	SMD2835	cool white (5000-6000K)	AC 110-120V	18W	≥80	110°	Ø187mm	Yes	
LED-1020 LED-1020-3CCT LED-1020-5CCT	1500LM	SMD2835		AC 110-120V	20W	≥80	110°	Ø225mm	Yes	
LED-1220 LED-1220-3CCT LED-1220-5CCT	1800LM	SMD2835		AC 110-120V	24W	≥80	110°	Ø282mm	Yes	
Certification ETL , cETL , Ja8 , Energy Star				Lamp body material: aluminum alloy				Colour: BK/SN/NW		

REMARKS:

3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K five color temperatures: 3CCT's three color temperatures, conventional matching drive box pull switch color temperature. 3CCT's three color temperatures also An optional wall switch can be used to control the color temperature.

Surface treatment

Ring BK




Ring BR



Ring CP



Ring BZ

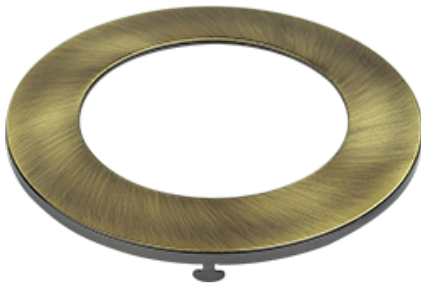

Ring SN



Ring CH



LED Slim Lights



Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable	
LED-320S LED-325-3CCT LED-325-5CCT	420LM	SMD2835	warm white (2700-3000K)	AC 110-120V	6W	≥80	110°	75mm x 75mm	Yes	
LED-420S LED-425-3CCT LED-425-5CCT	630LM	SMD2835		AC 110-120V	9/12W	≥80	110°	110mm x 110mm	Yes	
LED-421S LED-421S-3CCT LED-421S-5CCT	630LM	SMD2835		AC 110-120V	9/12W	≥80	110°	∅108mm	Yes	
LED-520S LED-520S-3CCT LED-520S-5CCT	900LM	SMD2835		AC 110-120V	12W	≥80	110°	135mm x 135mm	Yes	
LED-620S LED-620S-3CCT LED-620S-5CCT	1125LM	SMD2835		commercial white (3500-4000K)	AC 110-120V	15W	≥80	110°	156mm x 156mm	Yes
LED-621S LED-621S-3CCT LED-621S-5CCT	1125LM	SMD2835			AC 110-120V	15W	≥80	110°	∅157mm	Yes
LED-820S LED-820S-3CCT LED-820S-5CCT	1350LM	SMD2835		cool white (5000-6000K)	AC 110-120V	18W	≥80	110°	185mm x 185mm	Yes
LED-1220S LED-1220S-3CCT LED-1220S-5CCT	1800LM	SMD2835			AC 110-120V	24W	≥80	110°	282mm x 282mm	Yes
Certification				ETL , cETL , Ja8 , Energy Star			Lamp body material: aluminum alloy		Colour: BK/SN/NW	

REMARKS:

3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K five color temperatures: 3CCT's three color temperatures, conventional matching drive box pull switch color temperature. 3CCT's three color temperatures also An optional wall switch can be used to control the color temperature.

Surface treatment

Ring BK



Ring BR



Ring CP



Ring BZ



Ring SN



Ring CH



LED Slim Lights





H501

H601

H901

H1201


Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable	
LED-H501 LED-H501-3CCT	400LM	SMD2835	warm white (2700-3000K)	AC 110-120V	6W	≥80	110°	Ø135mm x 13mm	Yes	
LED-H601 LED-H601-3CCT	720LM	SMD2835	commercial white (3500-4000K)	AC 110-120V	12W	≥80	110°	Ø180mm x 13mm	Yes	
LED-H901 LED-H901-3CCT	1080LM	SMD2835		AC 110-120V	18W	≥80	110°	Ø225mm x 13mm	Yes	
LED-H1201 LED-H1201-3CCT	1440LM	SMD2835	cool white (5000-6000K)	AC 110-120V	24W	≥80	110°	Ø300mm x 13mm	Yes	
Certification ETL , cETL , Ja8 , Energy Star				Lamp body material: plastic+aluminum				Colour: NW		



TH-3030P

- Lumens: 1400 lm
- Light Source: SMD2835
- Wattage: 18W
- Input Voltage: AC 110-120V 60Hz
- Installation : Embedded or Suspended
- Certification: ETL , CETL

- Colour: NW
- Lamp body material: aluminum
- CCT: warm white(2800-3300K)
commercial white(4000-4500K)
cool white(5500-6500K)



TH-6060P

- Lumens: 3200 lm
- Light Source: SMD2835
- Wattage: 40W
- Input Voltage: AC 110-120V 60Hz
- Installation : Embedded or Suspended
- Certification: ETL , CETL

- Colour: NW
- Lamp body material: aluminum
- CCT: warm white(2800-3300K)
commercial white(4000-4500K)
cool white(5500-6500K)



TH-60120P

- Lumens: 4800 lm
- Light Source: SMD2835
- Wattage: 60W
- Input Voltage: AC 110-120V 60Hz
- Installation : Embedded or Suspended
- Certification: ETL , CETL

- Colour: NW
- Lamp body material: aluminum
- CCT: warm white(2800-3300K)
commercial white(4000-4500K)
cool white(5500-6500K)



Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable	
LED-H420S LED-H420S-3CCT LED-H420S-5CCT	630LM / 840LM	SMD2835	warm white (2700-3000K)	AC 110-120V	9/12W	≥80	110°	108mm x 108mm	Yes	
LED-H620S LED-H620S-3CCT LED-H620S-5CCT	1125LM	SMD2835	commercial white (3500-4000K)	AC 110-120V	15W	≥80	110°	158mm x 158mm	Yes	
LED-H420 LED-H420-3CCT LED-H420-5CCT	630LM / 840LM	SMD2835	cool white (5000-6000K)	AC 110-120V	9/12W	≥80	110°	∅108mm	Yes	
LED-H620 LED-H620-3CCT LED-H620-5CCT	1125LM	SMD2835		AC 110-120V	15W	≥80	110°	∅158mm	Yes	
Certification ETL , cETL , Ja8 , Energy Star				Lamp body material: Aluminum alloy			Colour: BK/SN/NW			

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

PF-420 / PF-420-3CCT / PF-420-5CCT

- CRI: >80
- Light Source: SMD2835
- Diameter: 120mm
- Thickness: 24mm
- Wattage(W): 9/12W
- Lumens(LM): 630/840LM
- Color Temperature(CCT):
2700K / 3000K / 4000K / 5000K / 6000K
- Lamp body material: Aluminum alloy
- Colour: BK/SN/NW

- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC100-120V
- Beam Angle: 110°
- Hole Cut: ∅108mm
- Working Lifetime(Hour): 50000

 **Waterproof for wet location**



LED Slim Lights



PAR16



PAR20



Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable	
LED-460B-PAR16 LED-460B-PAR16-3CCT LED-460B-PAR16-5CCT	630LM	COB	warm white (2700-3000K)	AC 110-120V	9W	≥80	35°	Ø106mm	Yes	
LED-460B-PAR20 LED-460B-PAR20-3CCT LED-460B-PAR20-5CCT	630LM	COB	commercial white (3500-4000K) cool white (5000-6000K)	AC 110-120V	9W	≥80	38°	Ø106mm	Yes	
Certification ETL , cETL , Ja8 , Energy Star				Lamp body material: Iron + aluminum				Colour: BK/SN/NW		

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K



3"3.5W



4" 9W

Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-U3580 LED-U3580-3CCT LED-U3580-5CCT	630LM	COB	warm white (2700-3000K)	AC 110-120V	9W	≥80	35°	Ø95mm	Yes
LED-4580 LED-4580-3CCT LED-4580-5CCT	650LM	COB	commercial white (3500-4000K)	AC 110-120V	9W	≥80	38°	Ø106mm	Yes
LED-4581 LED-4581-3CCT LED-4581-5CCT	650LM	SMD	cool white (5000-6000K)	AC 110-120V	9W	≥80	38°	Ø106mm	Yes
Certification	ETL , cETL , Energy Star			Lamp body material: Aluminum alloy			Colour: BK/NW		

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

LED - 4701 / LED - 4701-3CCT / LED - 4701 -5CCT

- CRI: ≥80
- Light Source: COB
- Diameter: 120mm
- Thickness: 27mm
- Wattage(W): 9W
- Lumens(LM): 630LM
- Color Temperature(CCT): 3000K / 4000K / 5000K/3CCT/5CCT
- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 38°
- Hole Cut: Ø106mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Aluminum alloy



LED - 4702 / LED - 4702-3CCT / LED - 4702 -5CCT


- CRI: ≥80
- Light Source: COB
- Diameter: 125mm
- Thickness: 27mm
- Wattage(W): 9W
- Lumens(LM): 630LM
- Color Temperature(CCT): 3000K / 4000K / 5000K/3CCT/5CCT
- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 46°
- Hole Cut: Ø106mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Aluminum alloy



LED - 4701G / LED - 4701G-3CCT / LED - 4701G -5CCT

- CRI: ≥80
- Light Source: COB
- Diameter: 120mm
- Thickness: 42mm
- Wattage(W): 9W
- Lumens(LM): 630LM
- Color Temperature(CCT): 3000K / 4000K / 5000K/3CCT/5CCT
- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 38°
- Hole Cut: Ø106mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Aluminum alloy



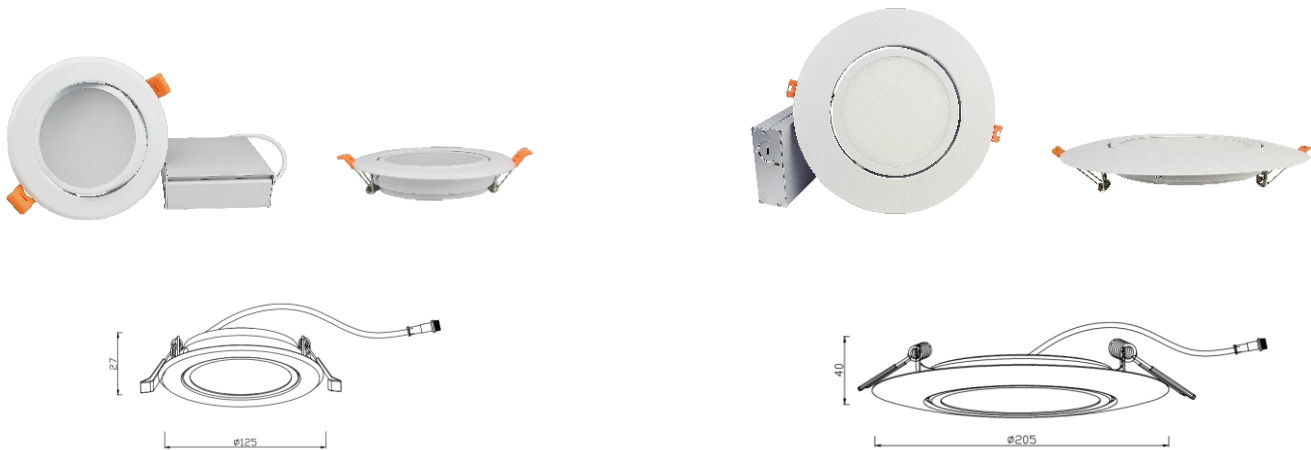

Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-4018 LED-4018-3CCT LED-4018-5CCT	630LM	SMD2835	warm white (2700-3000K)	AC 110-120V	9W	≥80	110°	Ø108mm	Yes
LED-6018 LED-6018-3CCT LED-6018-5CCT	840LM	SMD2835	commercial white (3500-4000K) cool white (5000-6000K)	AC 110-120V	12W	≥80	110°	Ø150mm	Yes
Certification ETL , cETL , Energy Star				Lamp body material: Iron + aluminum				Colour: BK/SN/NW	

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

LED - 380 / LED - 380-3CCT / LED - 380-5CCT

- CRI: ≥80
- Light Source: COB
- Diameter: 85.7mm
- Thickness: 42.8mm
- Lumens(LM): 490LM
- Color Temperature(CCT): 3000K / 4000K / 5000K 3CCT/5CCT
- Wattage(W): 7W
- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 35°
- Hole Cut: Ø73mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Aluminum alloy



LED - 3701 / LED - 3701-3CCT / LED - 3701-5CCT

- CRI: ≥80
- Light Source: COB
- Diameter: 98mm
- Thickness: 32mm
- Lumens(LM): 420LM
- Color Temperature(CCT): 3000K / 4000K / 5000K 3CCT/5CCT
- Wattage(W): 6W
- Colour: BK/SN/CH/WH
- Luminous Efficiency: 70lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 35°
- Hole Cut: Ø73mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Iron + aluminum



LED - 490 / LED - 490-3CCT / LED - 490-5CCT

- CRI: ≥80
- Light Source: COB
- Diameter: 128mm
- Thickness: 60mm
- Lumens(LM): 900LM
- Color Temperature(CCT): 3000K / 4000K / 5000K 3CCT/5CCT
- Wattage(W): 12W
- Luminous Efficiency: 80lm/w
- Input Voltage(V): AC110-120V
- Beam Angle: 24°
- Hole Cut: Ø106mm
- Working Lifetime(Hour): 50000
- Colour: BK/NW
- Lamp body material: Aluminum alloy




LED Downlights



Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-X3 LED-X3-3CCT LED-X3-5CCT	560LM	COB	warm white (2700-3000K)	AC 110-120V	9W	≥80	20°	Ø76mm	Yes
LED-X4 LED-X4-3CCT LED-X4-5CCT	900LM	COB	commercial white (3500-4000K)	AC 110-120V	12W	≥80	25°	Ø102mm	Yes
LED-X5 LED-X5-3CCT LED-X5-5CCT	1125LM	COB		AC 110-120V	15W	≥80	30°	Ø127mm	Yes
LED-X6 LED-X6-3CCT LED-X6-5CCT	1350LM	COB	cool white (5000-6000K)	AC 110-120V	18W	≥80	35°	Ø143mm	Yes
Certification	ETL , cETL , Energy Star			Lamp body material: Aluminum alloy			Colour: BK/NW		

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

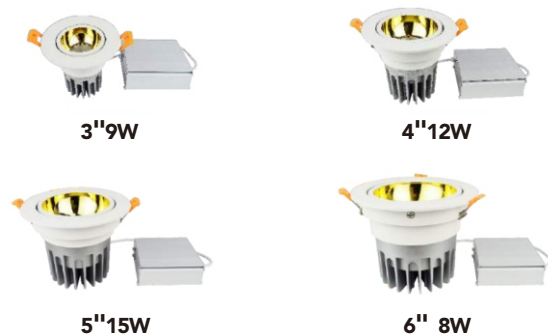

LED Downlights



Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-F31 LED-F31-3CCT LED-F31-5CCT	630LM	COB	warm white (2700-3000K)	AC 110-120V	9W	≥80	20°	Ø75mm	Yes
LED-F41 LED-F41-3CCT LED-F41-5CCT	840LM	COB	commercial white (3500-4000K)	AC 110-120V	12W	≥80	25°	Ø95mm	Yes
LED-F51 LED-F51-3CCT LED-F51-5CCT	1050LM	COB		AC 110-120V	15W	≥80	30°	Ø122mm	Yes
LED-F61 LED-F61-3CCT LED-F61-5CCT	1260LM	COB	cool white (5000-6000K)	AC 110-120V	18W	≥80	35°	Ø146mm	Yes
Certification ETL , cETL , Energy Star				Lamp body material: Aluminum alloy Colour: BK+GO/NW+GO					

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

LED-458 / LED-458-3CCT / LED-458-5CCT

- Lumens: 900LM
- Light Source: COB
- Input Voltage: AC 110-120V
- Beam Angle: 45°
- Lumens per watt: 75LM/W
- Power Factor: 0.9
- Colour: BK/NW
- Wattage: 12W
- CRI: ≥80
- Hole Cut: Ø108mm
- Lamp body material: Aluminum alloy
- CCT: warm white(2700-3000K)
commercial white(3500-4000K)
cool white(5000-6000K)





4"12W




5"15W



6"18W

Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-S40 LED-S40-3CCT LED-S40-5CCT	840LM	COB	warm white (2700-3000K)	AC 110-120V	12W	≥80	18°	95mm x 95mm	Yes
LED-S50 LED-S50-3CCT LED-S50-5CCT	1050LM	COB	commercial white (3500-4000K)	AC 110-120V	15W	≥80	22°	122mm x 122mm	Yes
LED-S60 LED-S60-3CCT LED-S60-5CCT	1260LM	COB	cool white (5000-6000K)	AC 110-120V	18W	≥80	28°	156mm x 156mm	Yes
Certification ETL , cETL , Energy Star				Lamp body material: Aluminum alloy Colour: BK/NW/NW+BK					

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K



4"12W



5"15W




6"18W

Item No.	Lumens	Light Source	CCT	Input Voltage	Wattage	CRI	Beam Angle	Hole Cut	Dimmable
LED-D40 LED-D40-3CCT LED-D40-5CCT	840LM	COB	warm white (2700-3000K)	AC 110-120V	12W	≥80	18°	Ø96mm	Yes
LED-D50 LED-D50-3CCT LED-D50-5CCT	1050LM	COB	commercial white (3500-4000K)	AC 110-120V	15W	≥80	22°	Ø122mm	Yes
LED-D60 LED-D60-3CCT LED-D60-5CCT	1260LM	COB	cool white (5000-6000K)	AC 110-120V	18W	≥80	28°	Ø140mm	Yes
Certification ETL , cETL , Energy Star				Lamp body material: Aluminum alloy Colour: BK/NW/NW+BK					

REMARKS: 3CCT stands for 3000K/4000K/5000K three color temperatures: 5CCT stands for 2700K/3000K/3500K/4000K/5000K

LED Downlights

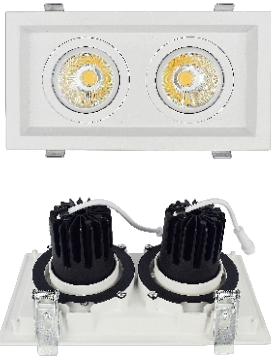

LED-NY2

CRI: ≥ 80
 CCT: warm white(3000K)
 commercial white(4000K)
 cool white(5000K)
 Beam Angle: 18°
 Lumens: 1680LM
 Lumens per watt: 70LM/W
 Power Factor: 0.95

Wattage: 24W
 Input Voltage: AC 110-120V
 Light Source: COB
 Hole Cut: 193X95mm
 Colour: BK/NW
 Installation : Recessed housing not required,
 installs directly into drywall with spring clips
 Lamp body material: Aluminum alloy



LED-NY3

CRI: ≥ 80
 CCT: warm white(3000K)
 commercial white(4000K)
 cool white(5000K)
 Beam Angle: 18°
 Lumens: 2520LM
 Lumens per watt: 70LM/W
 Power Factor: 0.95


Wattage: 36W
 Input Voltage: AC 110-120V
 Light Source: COB
 Hole Cut: 266X95mm
 Colour: BK/NW
 Installation : Recessed housing not required,
 installs directly into drywall with spring clips
 Lamp body material: Aluminum alloy

LED Drivers

- Half clamshell iron drive box
- Iron drive box
- Aluminum drive box
- Intelligent control
- Support WIFI connection
- Shell color customization



- Single Color Temperature
- Three color temperature
- Five color temperature

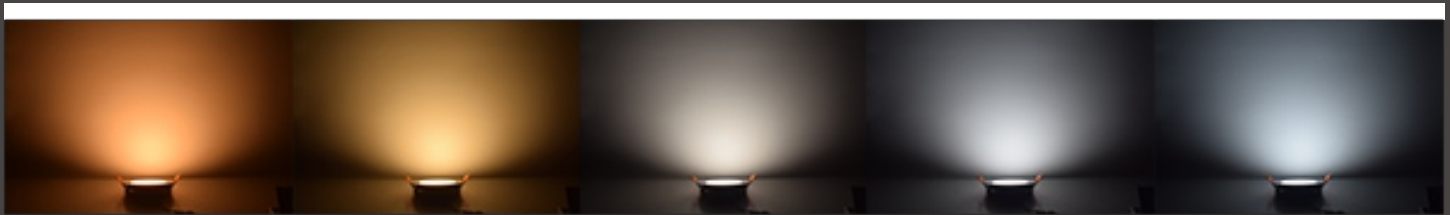

2700K

3000K

4000K

5000K

6000K

LED TRACK LIGHTING

HCRLED-303

- Lumens: 665LM
- Light Sour: COB
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 18°
- Input: AC 110-120V 60Hz
- Wattage: 9W
- Lamp body size: Ø60x100mm
- Lamp body material: Aluminum alloy
- Colour: BK/NW



HCRLED-031

- Lumens: 665LM
- Light Sour: COB
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 18°
- Input: AC 110-120V 60Hz
- Wattage: 9W
- Lamp body size: Ø68x100mm
- Lamp body material: Aluminum alloy
- Colour: BK/NW



HCRLED-041

- Lumens: 950LM
- Light Sour: COM
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 22°
- Input: AC 110-120V 60Hz
- Wattage: 12W
- Lamp body size: Ø80x125mm
- Lamp body material: Aluminum alloy
- Colour: BK/NW



HCRLED-051

- Lumens: 1235LM
- Light Sour: COB
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 30°
- Input: AC 110-120V 60Hz
- Wattage: 15W
- Lamp body size: Ø90x130mm
- Lamp body material: Aluminum alloy
- Colour: BK/NW



HCRLED-101

- Lumens: 500LM
- Light Sour: COB
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 18°/42°
- Input: AC 110-120V / AC 220-230V
- Wattage: 7W
- Lamp body size: Ø55x73mm
- Lamp body material: Aluminum alloy
- Colour: BK/NW



Track Accessories

WIRED



TR-C

Live end
2wire



TR-I

Inside I Type Connector
2wire



TR-L

L Type Connector
2wire



TR-T

T Type Connector
2wire



connector head
2wire



connector head
3wire



TR-C

Live end
3wire



TR-I

Inside I Type Connector
3wire



TR-L

L Type Connector
3wire



TR-S

Flexible connector
3wire



TR-T

T Type Connector
3wire



TR-X

+ Type Connector
3wire




TR-M

M Type Connector
3wire

TR-R




Track 2ft/4ft/8ft
• 2 wire
• Aluminum + copper wire
• Colour: BK/NW



TR-R



Track 2ft/4ft/8ft
• 3 wire
• Aluminum + copper wire
• Colour: BK/NW



LED FLUSH MOUNT

LED-1201

- CRI: >80
- CCT: warm white(3000K)
commercial white(4000K)
cool white(5000K)
- Beam Angle: 120°
- Wattage: 20W
- Shape: Round
- Lamp body material: Iron + plastic

- Lumens: 1400LM
- Lumens per watt: 70LM/W
- Input Voltage: AC120V
- Application: Bed Room, Living Room,
Indoor Room, Lobby, Corridor and so on
- Colour: NW
- Size: ∅325x80mm



LED-1201-3C

- CRI: >80
- CCT: warm white(3000K)
commercial white(4000K)
cool white(5000K)
- 3 CCT Adjustable
- Beam Angle: 120°
- Wattage: 20W
- Shape: Round
- Lamp body material: Iron + plastic

- Lumens: 1400LM
- Lumens per watt: 70LM/W
- Input Voltage: AC120V
- Application: Bed Room, Living Room,
Indoor Room, Lobby, Corridor and so on
- Colour: NW
- Size: ∅325x80mm



EP-2610

- CRI: 80
- CCT: warm white(3000K)
commercial white(4000K)
cool white(5000K)
- Beam Angle: 120°
- Wattage: 20W
- Shape: Round
- Lamp body material: Iron + Glass

- Lumens: 1400LM
- Lumens per watt: 70LM/W
- Input Voltage: AC120V
- Output Voltage: 48V
- Application: Bed Room, Living Room,
Indoor Room, Lobby, Corridor and so on
- Colour: NW
- Size: ∅300x80mm



LED - CL6 - 15W

- CRI: > 80
- CCT: warm white(3000K)
commercial white(4000K)
cool white(5000K)
- Beam Angle: 120°
- Wattage: 15W
- Shape: Round
- Lamp body material: Iron + plastic

- Lumens: 800LM
- Power factor: >0.95
- Input Voltage: AC120V
- Application: Bed Room, Living Room,
Indoor Room, Lobby, Corridor and so on
- Colour: SN
- Size: ∅300x95mm



LED - CL5 - 18W

- CRI: > 80
- CCT: warm white(3000K)
commercial white(4000K)
cool white(5000K)
- Beam Angle: 120°
- Wattage: 18W
- Shape: Round
- Lamp body material: Iron + plastic



- Lumens: 960LM
- Power factor: >0.95
- Input Voltage: AC120V
- Application: Bed Room, Living Room,
Indoor Room, Lobby, Corridor and so on
- Colour: SN
- Size: ∅350x100mm



METAL PLATES


MP1-11-WL301B

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx210mmx45mm
- Cut Hole Saw: $\varnothing 80$ mm

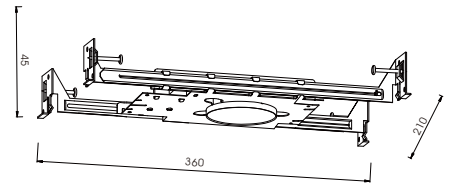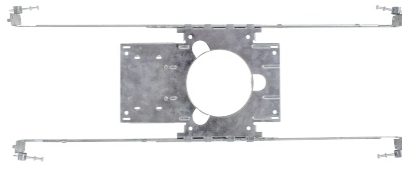



MP1-11-WL403

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx210mmx45mm
- Cut Hole Saw: $\varnothing 105$ mm

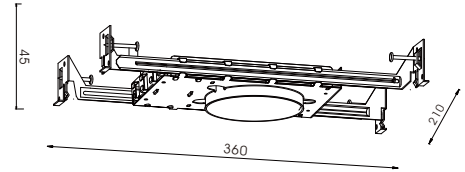



MP1-11-WL301

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx210mmx45mm
- Cut Hole Saw: $\varnothing 80$ mm

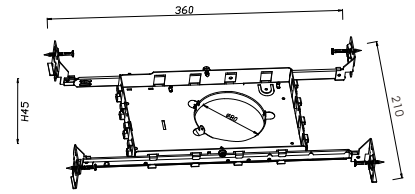



MP1-11-WL601

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx250mmx45mm
- Cut Hole Saw: $\varnothing 157$ mm

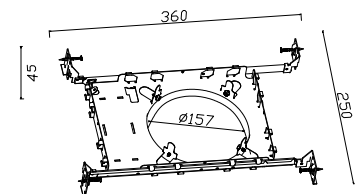



MP1-11-406-4A

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx270mmx45mm
- Cut Hole Saw: $\varnothing 107$ mm

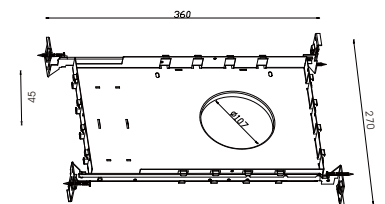



MP1-11-406-6A

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx270mmx45mm
- Cut Hole Saw: $\varnothing 157$ mm

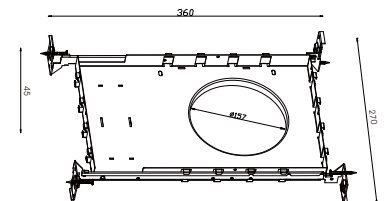



MP1 - 11 - 320 - 420 - 620

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx270mmx40mm
- Cut Hole Saw: $\varnothing 73$ mm / $\varnothing 106$ mm / $\varnothing 157$ mm

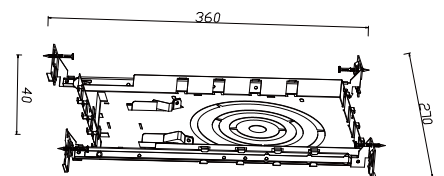



MP1 - 11 - 520 - 620 - 820

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 395mmx375mmx40mm
- Cut Hole Saw: $\varnothing 131\text{mm}$ / $\varnothing 158\text{mm}$ / $\varnothing 184\text{mm}$

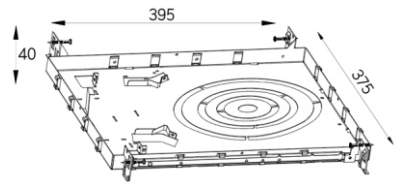



MP1- 11 - 320S - 420S - 620S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 360mmx270mmx40mm
- Cut Hole Saw: 75x75mm / 110x110mm / 156x156mm

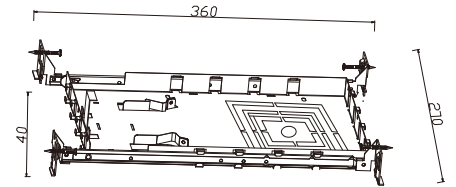


MP1- 11 - 520S - 620S - 820S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 395mmx375mmx40mm
- Cut Hole Saw: 134x134mm / 156x156mm / 186x186mm

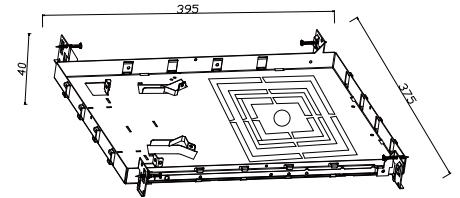



GP-4S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx165mmx0.8mm
- Cut Hole Saw: 110x110mm

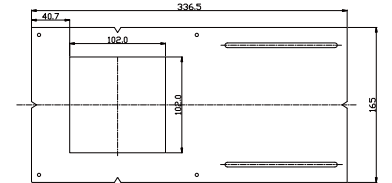



GP-4-A

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx165mmx1mm
- Cut Hole Saw: $\varnothing 107.8\text{mm}$

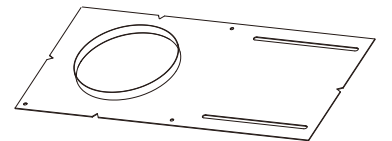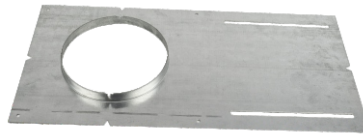


GP-4

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx165mmx0.8mm
- Cut Hole Saw: $\varnothing 109\text{mm}$

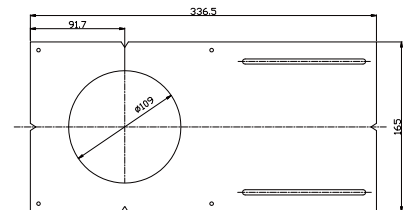



GP-6S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx230mmx0.8mm
- Cut Hole Saw: 156x156mm

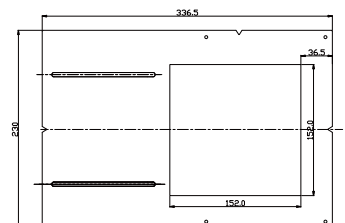

GP-6

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx230mmx0.8mm
- Cut Hole Saw: $\varnothing 165\text{mm}$

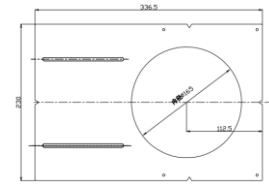

GP-6-A

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 336.5mmx230mmx11mm
- Cut Hole Saw: $\varnothing 163\text{mm}$

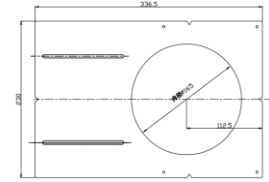



PLATE - 3

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 660mmx157mmx0.8mm
- Cut Hole Saw: $\varnothing 75\text{mm}$

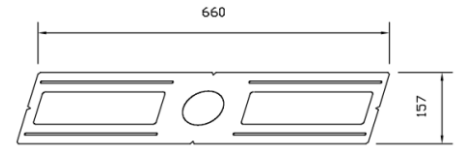



PLATE - 4S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 660mmx157mmx0.8mm
- Cut Hole Saw: 110x110mm

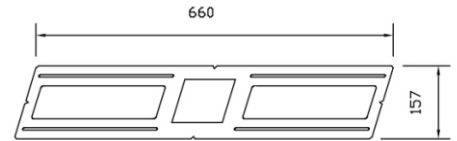


PLATE - 4

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 660mmx157mmx0.8mm
- Cut Hole Saw: $\varnothing 105\text{mm}$

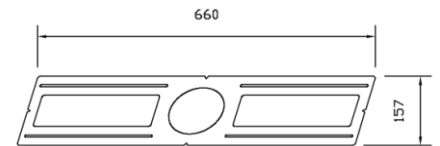


PLATE - 6S

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 660mmx210mmx0.8mm
- Cut Hole Saw: 157mmx157mm


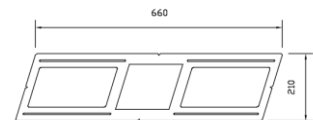


PLATE - 6

- Utilizes notches for easy alignment of multiple plates
- Material: Galvanized sheet
- Size : 660mmx210mmx0.8mm
- Cut Hole Saw: $\varnothing 159\text{mm}$

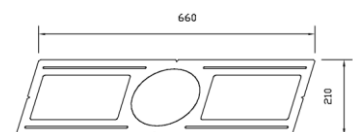

LED STEP LIGHTS

LED- 2202

- CRI: >80
- Light Source: SMD2835
- Diameter: Ø50mm
- Thickness: 37mm
- Wattage(W): 1W
- LEDs lumens: 16LM/W
- Colour: BK/SN/WH
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- Hole Cut: Ø33mm
- Working Lifetime(Hour):50000
- Lamp body material: Aluminum alloy



LED- 2202S

- CRI: >80
- Light Source: SMD2835
- Diameter: 50X50mm
- Thickness: 37mm
- Wattage(W): 1W
- LEDs lumens: 16LM/W
- Colour: BK/SN/WH
- Color Temperature(CCT): 3000K / 4000K / 65000K
- Input Voltage(V): DC12V or DC24V
- Hole Cut: Ø33mm
- Working Lifetime(Hour):50000
- Lamp body material: Aluminum alloy



LED- SP17

- CRI: >80
- Light Source: SMD2835
- Diameter: 50.5mm
- Thickness: 24.5mm
- Wattage(W): 1W-2.5W
- LEDs lumens: 40LM/W
- Colour: BK/SN/CH/WH
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- certification: ETL
- Working Lifetime(Hour):50000
- Lamp body material: Aluminum



LED- SP17S

- CRI: >80
- Light Source: SMD2835
- Diameter: 50.5X50.5mm
- Thickness: 24.5mm
- Wattage(W): 1W-2.5W
- LEDs lumens: 40LM/W
- Colour: BK/SN/CH/WH
- Color Temperature(CCT): 3000K / 4000K / 65000K
- Input Voltage(V): DC12V or DC24V
- certification: ETL
- Working Lifetime(Hour):50000
- Lamp body material: Aluminum



LED-SP26

- CRI: >80
- Light Source: SMD2835
- Diameter: 26mm
- Thickness: 23mm
- Wattage(W): 0.17W / 1W
- LEDs lumens: 60LM/W
- Colour: Aluminum color
- Color Temperature(CCT): 3000K / 4000K / 5000K
- Input Voltage(V): DC12V or DC24V
- certification: ETL
- Working Lifetime(Hour):50000
- Lamp body material: Aluminum



Accessories



SN



BK



WH



SN



BK



WH



SN



BK



WH



SN



BK



WH

LED CANISTER LIGHT

LED-4008

- Lumens: 630LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Input: AC 110-120V
- Wattage: 9W
- Lamp body size: Ø128x79mm



LED-6006

- Lumens: 1125LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 15W
- Lamp body size: Ø190x87mm



GLED-4008

- Lumens: 630LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 9W
- Lamp body size: Ø128x60mm



GLED-6006

- Lumens: 1125LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 15W
- Lamp body size: Ø190x68mm



LED-AD0406

- Lumens: 630LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 9W
- Lamp body size: Ø128x55mm



LED-AD0607

- Lumens: 1125LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 15W
- Lamp body size: Ø188x60mm



LED-408

- Lumens: 630LM
- Light Sourc: SMD2835
- CRI: >80
- CCT: 3000K 4000K 5000K
- Beam Angle: 110°
- Colour: BK/NW
- Hole Cut: Ø125mm

- Lamp body material: Aluminum
- Input: AC 110-120V
- Wattage: 9W
- Lamp body size: Ø150x74mm



STEAM HOOD

VBE-4

- Vapor Barrier for 4" Slim Lights
- Dimensions: 465x215x72mm
- Hoel: Ø107mm



VB-6

- Vapor Barrier
- Dimensions: 630x470x210mm



VB-7

- Vapor Barrier
- Dimensions: 710x515x210mm



CORD

Cord 24"

- 24" extension cord for Slim / Disc lights
- Optional single color temperature or three color temperature plug cable



Cord 60"

- 60" extension cord for Slim / Disc lights
- Optional single color temperature or three color temperature plug cable



Cord 120"

- 120" extension cord for Slim / Disc lights
- Optional single color temperature or three color temperature plug cable



Cord 240"

- 240" extension cord for Slim / Disc lights
- Optional single color temperature or three color temperature plug cable

